


h 3 cm Rubber Speed Moderator



	Dimensions (H / L / W): 3 x 60 x 48 cm insert: 12 x 17,5 cm		Construction materials: High elasticity vulcanized rubber product
	Weight: 8,7 kg		External surface treatments: application of 6 elastoplastic yellow reflective inserts

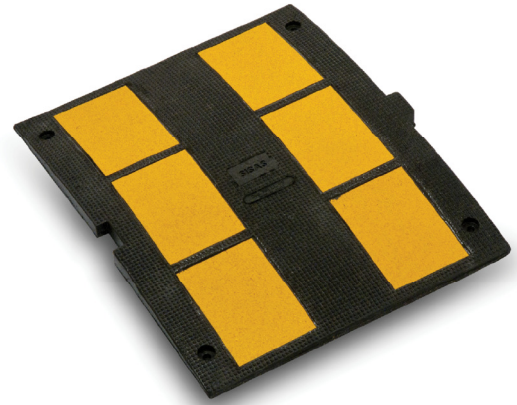

Product Description

Vulcanized rubber product, very elastic and resistant to the hurts and the crushes of the vehicles.

Thanks to the yellow reflective inserts you can have a major visibility during the night.

In the upper side the speed moderator has anti-slip parts that facilitates the water flow. The application to the ground is made through 4 expansion fixing screws.

Working Description

Rubber speed moderator can be installed on the streets with a speed limit of 50 km/h or less, on residential streets, in public and private parks, in residences, etc.

They can be installed in sequence and must be signaled.

Rubber speed moderators must form an alternating yellow and black striping parallel to the direction.

Miscellaneous

The speed moderator must be hardly installed on the ground using appropriate screws, to avoid shifts or detachments, it must be also easily removable.

Packaging

	Dimension: 80x120x h 100 cm weight: 880 kg
--	---

Norms

- Article 42 of the Road Code
- Article 179 Regulation for execution and realization of the road code

accessories	Code: 000300002